




RoHS
compliant

Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 550V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

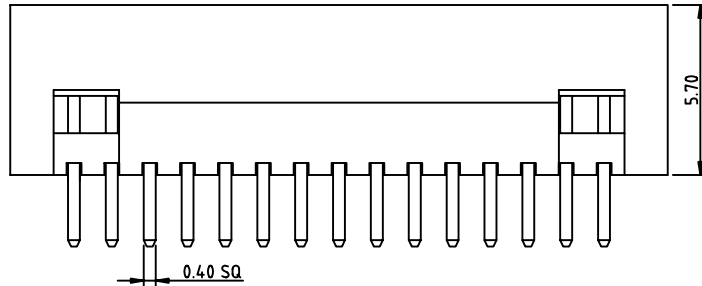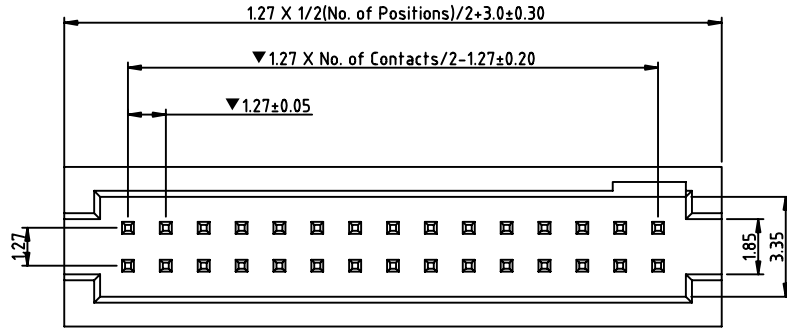

Recommended P.C.B
 Layout(±0.05)

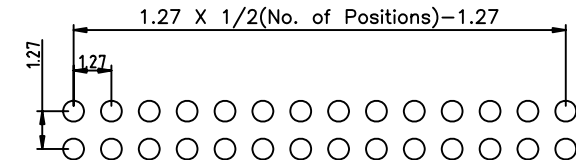

Ordering Information

BH127057D - 2XX X X 01

No. of pins
2*3-2*32

Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PA6T
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

Fortune Star

Fortune Star Technical Co., Ltd

TITLE:		1.27mm Box Header Dual row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	BH127057D-2XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	
X. ±0.50					SCALE:	1:1	
X.X° ±2°					SHEET:	1/1	
X.° ±3°					REV:	A	