






Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50µ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 350V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

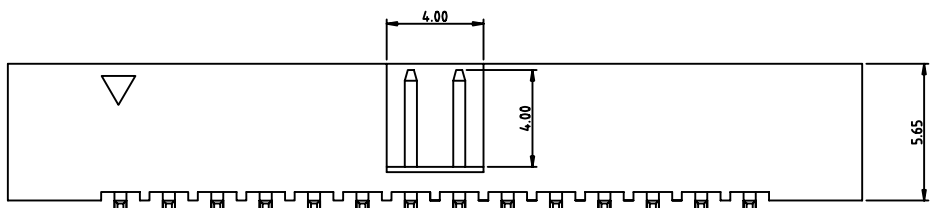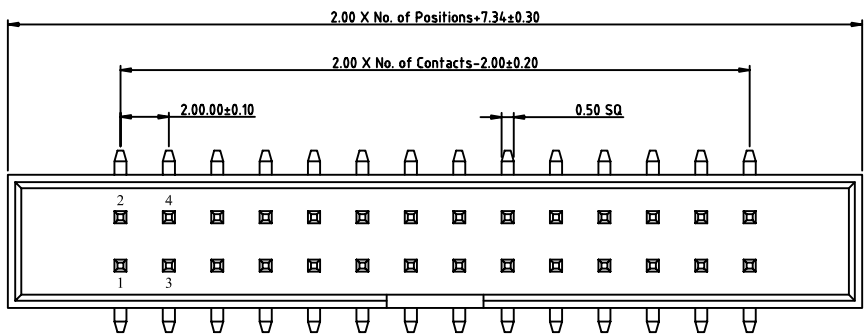

Recommended P.C.B
 Layout (±0.05)



Ordering Information

BH2000565S - 2XX X X X 01

- No. of pins: 2*3-2*64
- Plating Option: A = Gold Flash, B = 3U" Gold, C = 5U" Gold, E = 15U" Gold, T = Tin, Z = Special
- Insulator Material Option: A = PBT, B = PA6T, F = LCP, Z = Special
- Packing Option: A = Tray, B = Bag, C = Tube, Z = Special

Fortune Star Fortune Star Technical Co., Limited

TITLE:		2.00mm Box Header Dual row SMT					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	BH2000565S-2XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4			UNIT:
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
X.X° ±2°			REV:	A			
X.° ±3°							