




RoHS
compliant

Specification:

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50 μ " Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 350V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45 $^{\circ}$ C to +105 $^{\circ}$ C
 Soldering temperature: 260 $^{\circ}$ C, 5s.

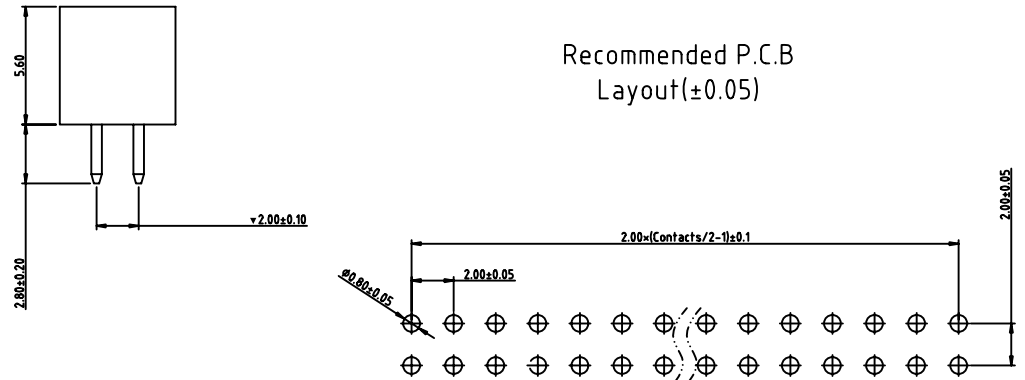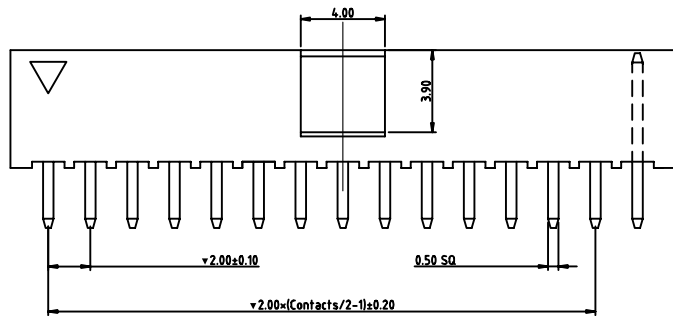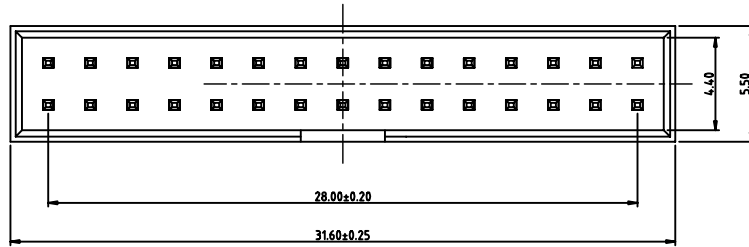

Ordering Information

BH200056D - 2XX X X 01

No. of pins
2*3-2*64

Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PA6T
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

Fortune Star

Fortune Star Technical Co., Limited

TITLE: 2.00mm Box Header Dual row Dip type

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	BH200056D-2XX-01	
X.XX	± 0.25	CHECKED	Jhon	PROJECTION				
X.X	± 0.35			X.X $^{\circ}$	$\pm 2^{\circ}$			
X.	± 0.50	APPROVED	Jack	SIZE:	A4	UNIT:	MM	SCALE: 1:1
						SHEET: 1/1	REV: A	