


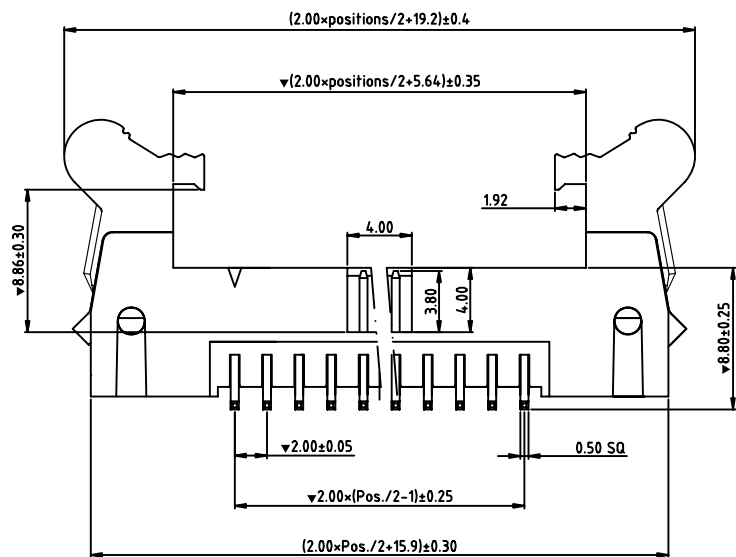


RoHS compliant

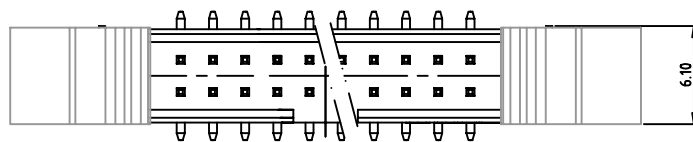

Recommended P.C.B
Layout(±0.05)



Specification:

Material:
Contact Material: Brass
Contact plating: Au or Sn Over 50μ" Ni
Insulator Material: Black Polyester UL94V-0
Standard: LCP+30%G.F

Electrical:
Current rating: 1.5Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage: 550V AC/minute

Mechanical:
Mechanical life cycle: min.200
Operating temperatures: -45°C to +105°C
Soldering temperature: 260°C, 5s.

Ordering Information

EH200172SS - 2XX X X 01

No. of pins
2*5-2*25

Plating Option
A = Gold Flash
B = 3U" Gold
C = 5U" Gold
E = 15U" Gold
T = Tin
Z = Special

Insulator Material
Option
A = PBT
B = PA6T
F = LCP
Z = Special

Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

Fortune Star

Fortune Star Technical Co., Limited

TITLE: 2.00mm Ejector Header Dual row SMT Short Latch

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH200172SS-2XX-01						
X.XX	±0.25	CHECKED	Jhon	PROJECTION									
X.X	±0.35			APPROVED	Jack			SIZE:	A4	UNIT:	MM	SCALE:	1:1
X.	±0.50												