
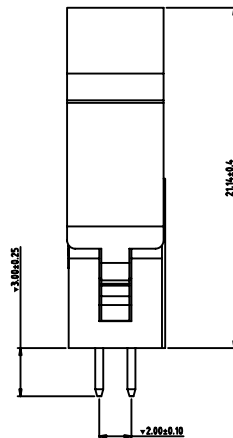
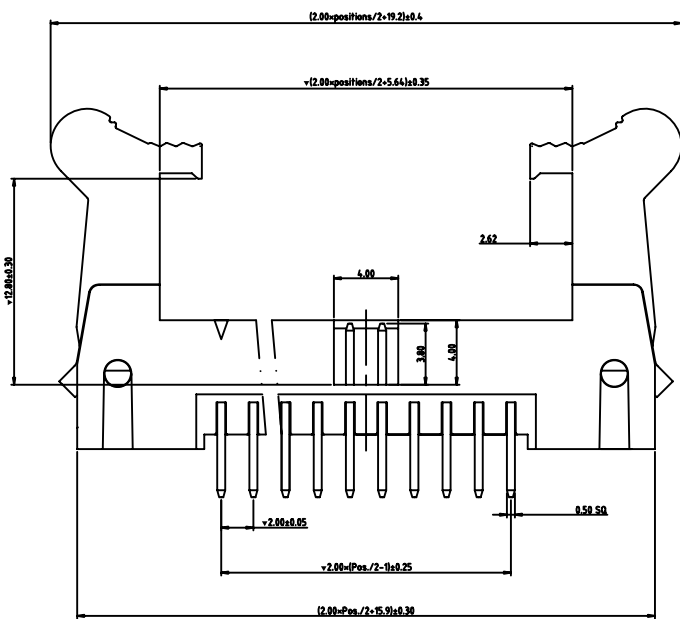


RoHS
compliant

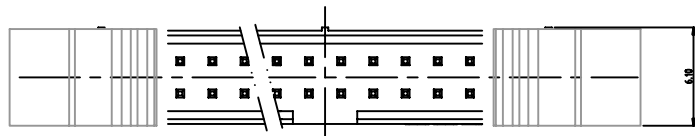

Specification:

Material:

Contact Material: Brass

Contact plating: Au or Sn Over $50\mu\text{m}$ Ni

Insulator Material: Black Polyester UL94V-0

Standard: LCP+30%G.F

Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: $\leq 20\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Withstanding Voltage: 550V AC/minute


Mechanical:

Mechanical life cycle: min.200

Operating temperatures: -45°C to $+105^\circ\text{C}$

Soldering temperature: 260°C , 5s.

Recommended P.C.B
Layout (± 0.05)

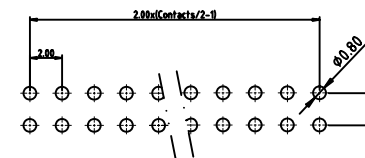

Ordering Information

EH2002114DL - 2XX X X X 01

No. of pins
2*5-2*25

Plating Option
A = Gold Flash
B = 3U" Gold
C = 5U" Gold
E = 15U" Gold
T = Tin
Z = Special

Insulator Material
Option
A = PBT
B = PA6T
F = LCP
Z = Special

Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

Fortune Star

Fortune Star Technical Co., Limited

TITLE:		2.00mm Ejector Header Dual row Dip type Long Latch					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH2002114DL-2XX-01	
X.XX ± 0.25	CHECKED	Jhon	PROJECTION				
X.X ± 0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	
X. ± 0.50			SCALE:	1:1	SHEET:	1/1	
					REV:	A	