

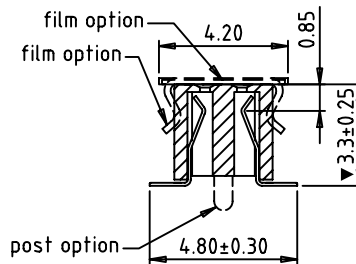
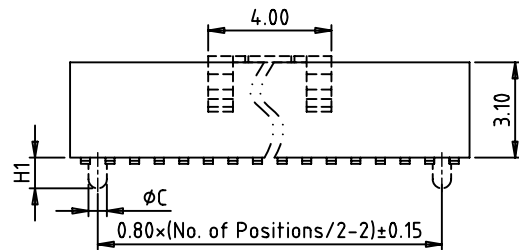


RoHS compliant

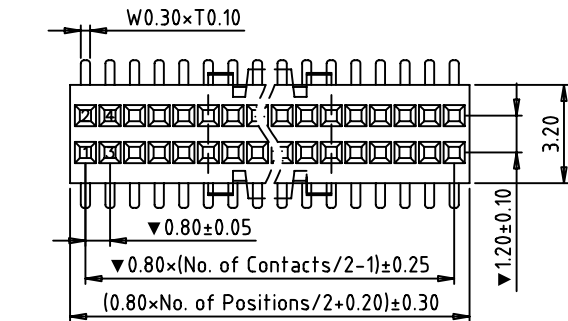

Recommended P.C.B
Layout(±0.05)



SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 0.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 300V AC/minute
 Operating temperature: -55°C to+105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

Ordering Information

FH080031VSU1 - XXX X X X 01P

No. of pins
2x3-2x50

Plating Option
A = Gold Flash
B = 3U" Gold
C = 5U" Gold
E = 15U" Gold
T = Tin
Z = Special

Insulator Material
Option
A = PBT
B = PAGT
F = LCP
Z = Special

Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

Fortune Star Fortune Star Technical Co., Limited

TITLE: 0.8mm Female Header Dual row SMT type

| | | | | | | | | |
|--|-------|----------|--------|------------|------------|--------------|------------------|------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | DRAWN | Robert | DATE: | 2012-03-28 | DRAWING NO.: | FH080031VSU1-01P | |
| X.XX | ±0.25 | CHECKED | Jhon | PROJECTION | | | | |
| X.X | ±0.35 | | | X.X° | ±2° | | | |
| X. | ±0.50 | APPROVED | Jack | SIZE: | A4 | UNIT: | MM | SCALE: 1:1 |
| | | | | | | SHEET: | 1/1 | REV: A |