

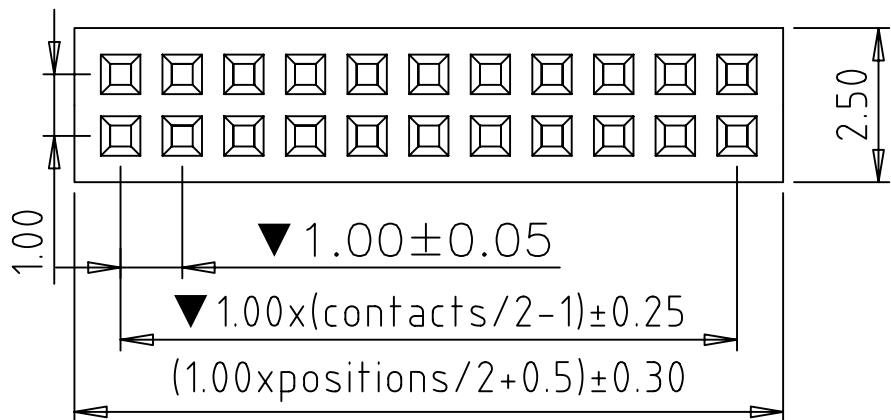
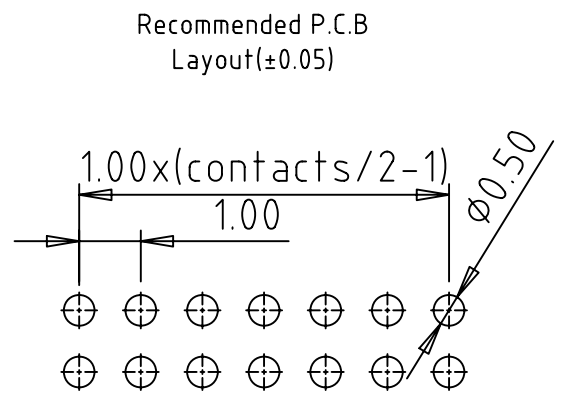


RoHS compliant

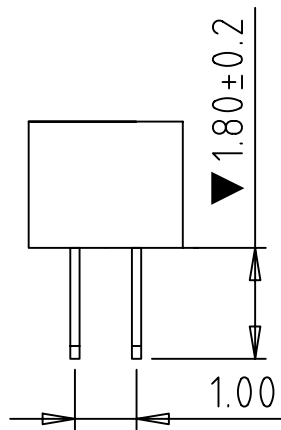

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 0.75Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 300V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C ± 5° 5S
 Critical Dimensions: ▼

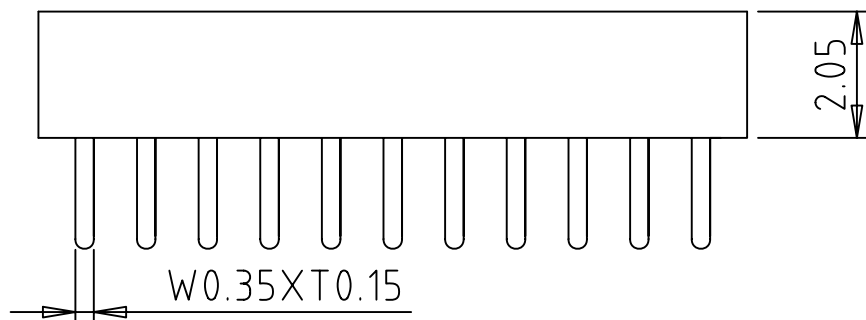

Ordering Information

FH100020DU1 - 2XX X X X 01

No. of pins: 2*3-2*50
 Plating Option: A = Gold Flash, B = 30" Gold, C = 50" Gold, E = 15U" Gold, T = Tin, Z = Special
 Insulator Material Option: A = PBT, B = PAGT, F = LCP, Z = Special
 Packing Option: A = Tray, B = Bag, C = Tube, Z = Special

Fortune Star		Fortune Star Technical Co., Limited			
TITLE: 1.00mm Female Header Dual row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.: FH100020DU1-2XX-01
X.XX ±0.25	CHECKED	Jhon	PROJECTION		
X.X ±0.35	APPROVED	Jack	SIZE: A4	UNIT: MM	SCALE: 1:1
X. ±0.50				SHEET: 1/1	REV: A