

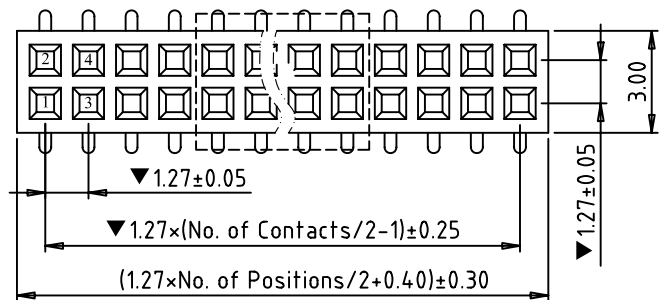
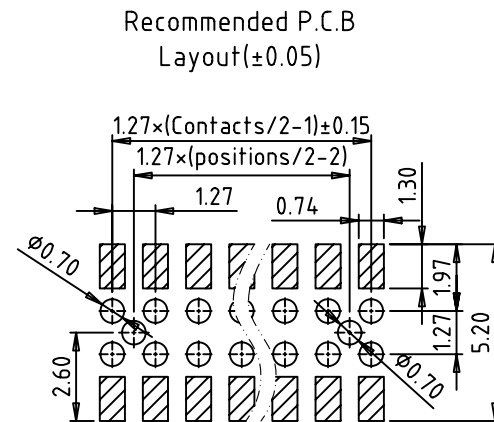


RoHS  
compliant

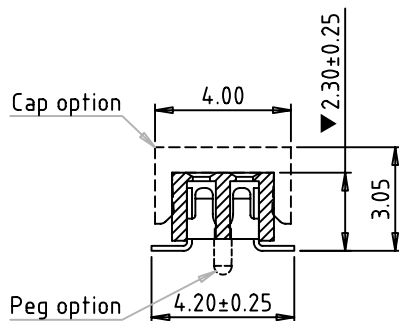

No. of positions	dim. L
$\geq 2 \times 4P$	5.1
$2 \times 2P / 2 \times 3P$	2.5

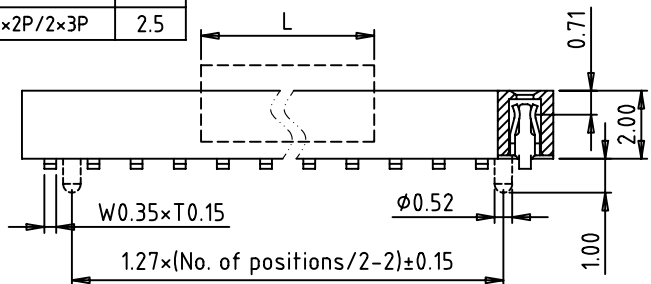

### SPECIFICATIONS

Contact: phosphor bronze  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0

Current rating: 1.0Amps  
 Contact resistance: 20m $\Omega$  max.  
 Insulation resistance: 1000M $\Omega$  min. at 100V  
 Withstanding Voltage: 300V AC/minute  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 260°C  $\pm$  5° 5S  
 Critical Dimensions:  $\nabla$

### Ordering Information

FH127020VS1U - 2XX X X X 01

No. of pins  
2\*3-2\*50

Plating Option  
 A = Gold Flash  
 B = 3U" Gold  
 C = 5U" Gold  
 E = 15U" Gold  
 T = Tin  
 Z = Special

Insulator Material  
Option  
 A = PBT  
 B = PAGT  
 F = LCP  
 Z = Special

Packing Option  
 A = Tray  
 B = Bag  
 C = Tube  
 Z = Special

**Fortune Star** Fortune Star Technical Co., Limited

TITLE: 1.27mm Female Header Dual row SMT

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127020VS1U-2XX-01
X.XX	$\pm 0.25$	CHECKED	Jhon	PROJECTION			
X.X	$\pm 0.35$	APPROVED	Jack	SIZE:	A4	UNIT:	MM
X.	$\pm 0.50$			SCALE:	1:1	SHEET:	1/1
						REV:	A