
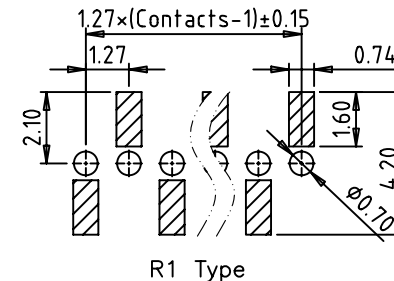
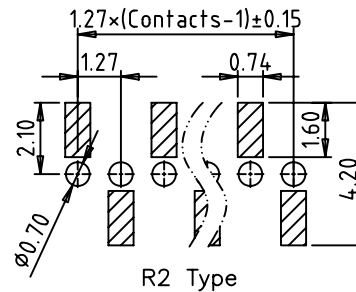

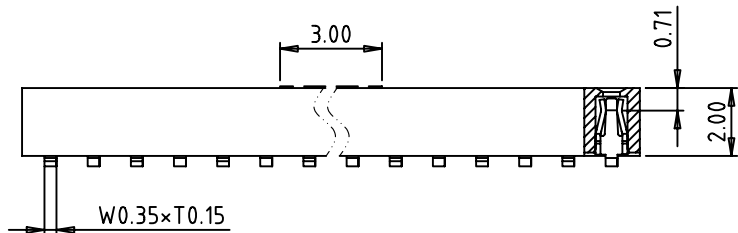
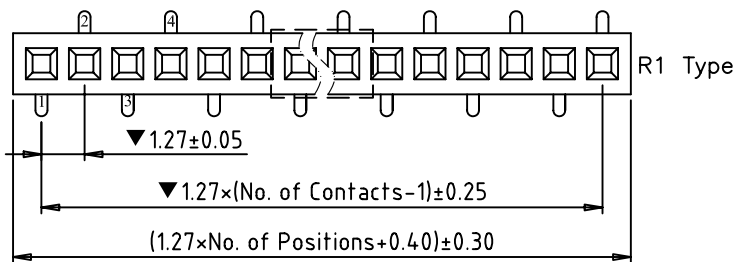


RoHS compliant



**SPECIFICATIONS**

Contact: phosphor bronze  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0  
 Current rating: 1.0Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 300V AC/minute  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

Recommended P.C.B  
 Layout(±0.05)

**Ordering Information**

**FH127020VSXU - 1XX X X X 01**

No. of pins 1\*2-1\*50  
 Plating Option  
 A = Gold Flash  
 B = 3U" Gold  
 C = 5U" Gold  
 E = 15U" Gold  
 T = Tin  
 Z = Special  
 Insulator Material Option  
 A = PBT  
 B = PAGT  
 F = LCP  
 Z = Special  
 Packing Option  
 A = Tray  
 B = Bag  
 C = Tube  
 Z = Special

**Fortune Star**

Fortune Star Technical Co., Limited

TITLE:		1.27mm Female Header Single row SMT				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127020VSXU-1XX-01
X.XX ±0.25	CHECKED	Jhon	PROJECTION			
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM
X. ±0.50			SCALE:	1:1	SHEET:	1/1
X.X° ±2°			REV:	A		
X.° ±3°						