RoHS compliant

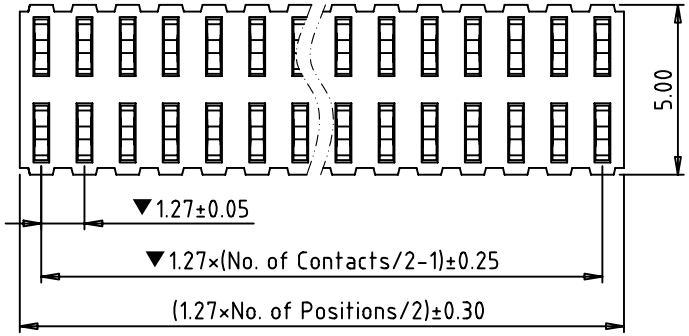

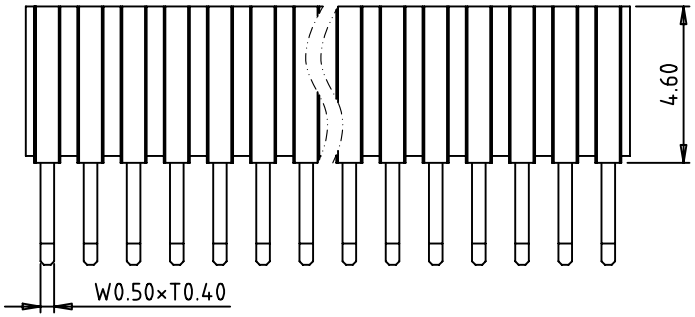

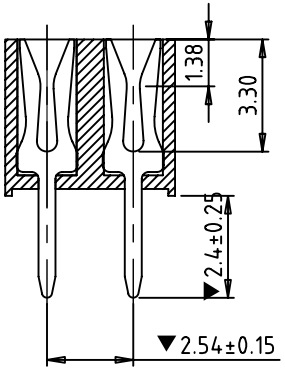

SPECIFICTIONS

Contact:	phosphor bronze
Contact plating:	see ordering information
Insulator:	black glass filled polyester UL94V-0
Current rating:	1.0Amps
Contact resistance:	20mΩ max.
Insulation resistance:	1000MΩ min. at 100V
Withstanding Voltage:	300V AC/minute
Operaing temperature:	-55°C to+105°C
Soldering temperature:	245°C±5° 5S
Critical Dimensions: ▼	

Recommended P.C.B Layout(±0.05)

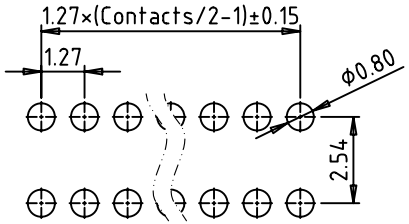

Ordering Information

FH127046DY1 - 2XX X X X 01

- 2XX: No. of pins 2*2-2*50
- X (Plating Option): A = Gold Flash; B = 3U" Gold; C = 5U" Gold; E = 15U" Gold; T = Tin; Z = Special
- X (Insulator Material Option): A = PBT; B = PA6T; F = LCP; Z = Special
- X (Packing Option): A = Tray; B = Bag; C = Tube; Z = Special
- 01

Fortune Star Fortune Star Technical Co., Limited

TITLE: 1.27mm Female Header Single row Dip type

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127046DY1-2XX-01	
X.XX ±0.25 X.X ±0.35 X. ±0.50 X.X° ±2° X.° ±3°	CHECKED	Jhon	PROJECTION				
	APPROVED	Jack	SIZE: A4	UNIT: MM	SCALE: 1:1	SHEET: 1/1	REV: A