

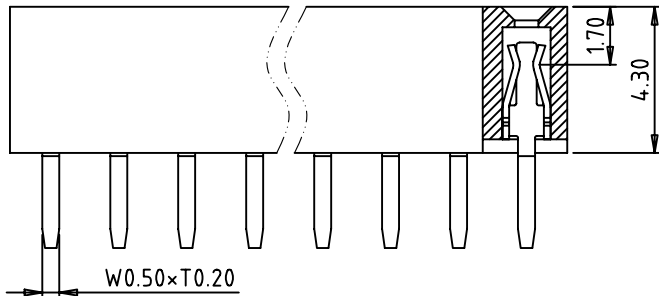



RoHS
compliant

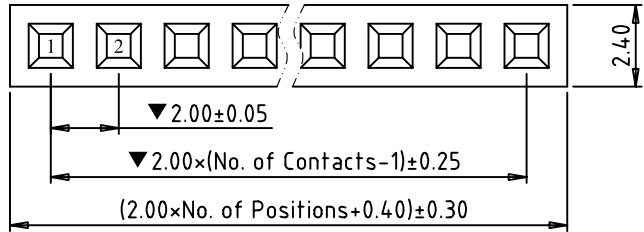

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Operating temperature: -55°C to+105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

Recommended P.C.B
 Layout(±0.05)

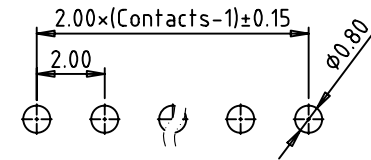

Ordering Information

FH200043D1U - 1XX X X X 01

No. of pins
1*2-1*40

Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PAGT
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

Fortune Star

Fortune Star Technical Co., Limited

TITLE: 2.00mm Female Header Single row Dip type

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH200043D1U-1XX-01	
X.XX ±0.25	X.X° ±2°	CHECKED	Jhon	PROJECTION				
X.X ±0.35	X.° ±3°	APPROVED	Jack	SIZE:	A4	UNIT:	MM	SCALE: 1:1
X. ±0.50						SHEET:	1/1	REV: A