
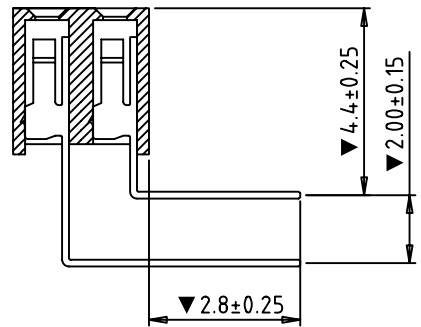
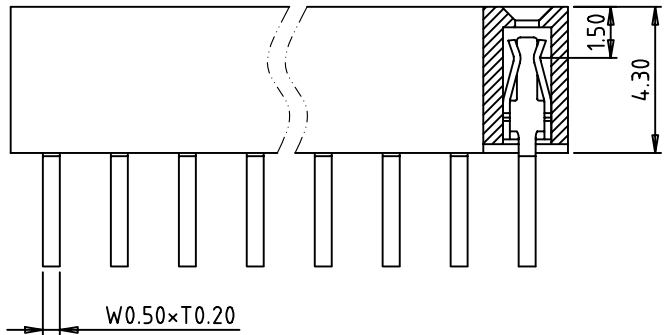


RoHS compliant

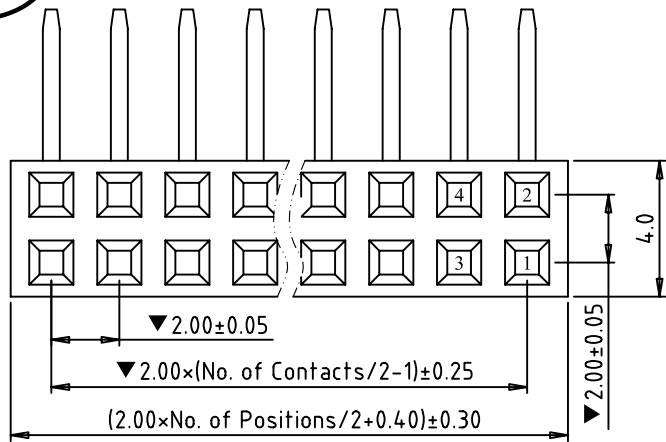


**SPECIFICATIONS**

Contact: phosphor bronze  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0

Current rating: 1.5Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 450V AC/minute  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

Recommended P.C.B  
 Layout(±0.05)

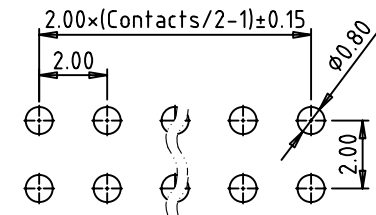

**Ordering Information**

**FH200043R1U - 2XX X X X 01**

No. of pins 2×2-2×40  
 Plating Option  
 A = Gold Flash  
 B = 3U" Gold  
 C = 5U" Gold  
 E = 15U" Gold  
 T = Tin  
 Z = Special

Insulator Material Option  
 A = PBT  
 B = PAGT  
 F = LCP  
 Z = Special

Packing Option  
 A = Tray  
 B = Bag  
 C = Tube  
 Z = Special

**Fortune Star** Fortune Star Technical Co., Limited

TITLE: 2.00mm Female Header Dual row Right angle type

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH200043R1U-2XX-01	
X.XX	±0.25	X.X°	±2°	CHECKED		Jhon	PROJECTION	
X.X	±0.35	X.°	±3°	APPROVED		Jack	SIZE:	A4
X.	±0.50			UNIT:	MM	SCALE:	1:1	SHEET: 1/1
						REV:	A	