

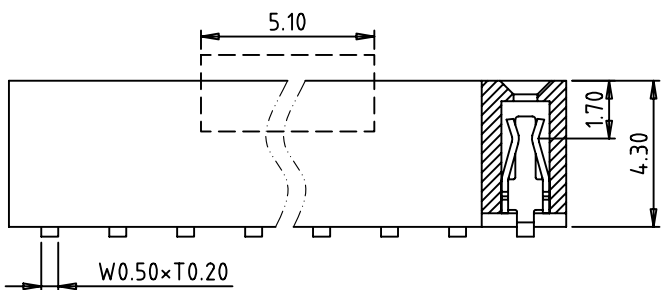
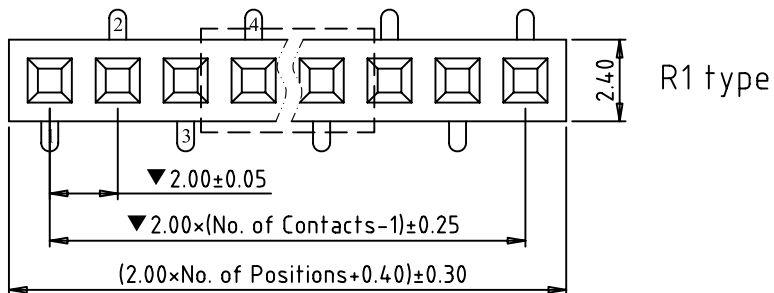



RoHS compliant

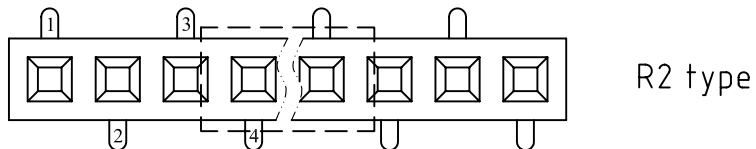

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 450V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 260°C±5° 5S
 Critical Dimensions: ▼

Recommended P.C.B Layout(±0.05)

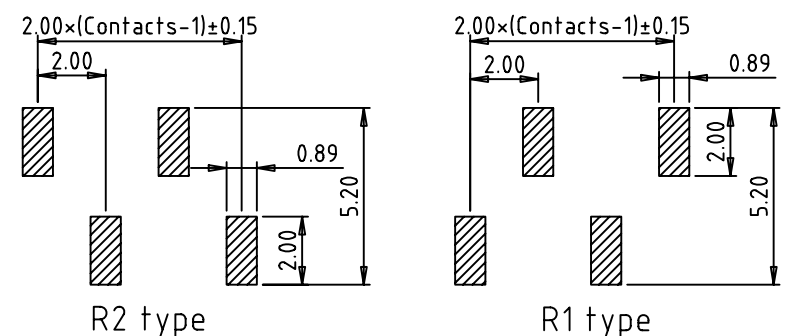

Ordering Information

FH200043VSXU - 1XX X X X 01

No. of pins 1*2-1*40
 Plating Option A = Gold Flash B = 30" Gold C = 50" Gold E = 15U" Gold T = Tin Z = Special
 Insulator Material Option A = PBT B = PAGT F = LCP Z = Special
 Packing Option A = Tray B = Bag C = Tube Z = Special

Fortune Star		Fortune Star Technical Co., Limited			
TITLE: 2.00mm Female Header Single row Vertical SMT					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.: FH200043VSXU-1XX-01
X.XX ±0.25	CHECKED	Jhon	PROJECTION		
X.X ±0.35	APPROVED	Jack	SIZE: A4	UNIT: MM	
X. ±0.50					SHEET: 1/1
					REV: A