


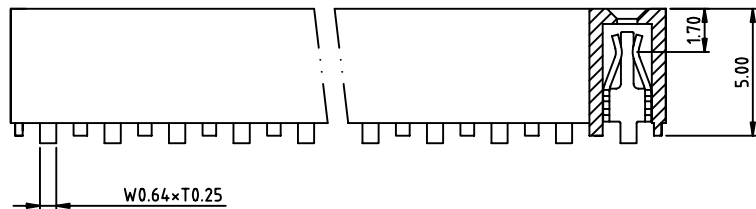


RoHS compliant

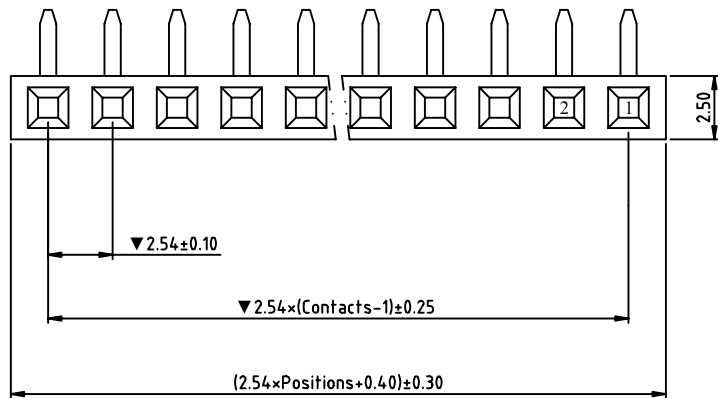

Recommended P.C.B
Layout(±0.05)



SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 3.0Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C ± 5° 5S
 Critical Dimensions: ▼

Ordering Information

FH254050R1U - 1XX X X X 01

No. of pins 1*2-1*40
 Plating Option A = Gold Flash B = 3U" Gold C = 5U" Gold E = 15U" Gold T = Tin Z = Special
 Insulator Material Option A = PBT B = PAGT F = LCP Z = Special
 Packing Option A = Tray B = Bag C = Tube Z = Special

Fortune Star

Fortune Star Technical Co., Limited

TITLE: 2.54mm Female Header Single row Right angle type							
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH254050R1U-1XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	SCALE: 1:1
X. ±0.50					SHEET:	1/1	REV: A