
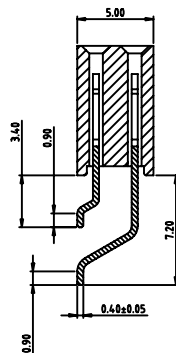
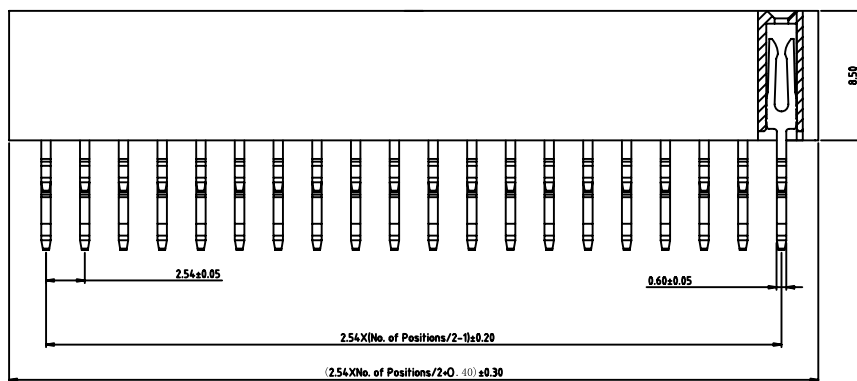



RoHS
compliant



SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 3.0Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C ± 5° 5S
 Critical Dimensions: ▼

Recommended P.C.B
 Layout (±0.05)

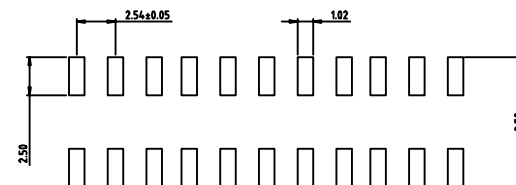

Ordering Information

FH254085HS1Y - 2XX X X X 01

No. of pins
2x3-2x40

Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PAGT
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

Fortune Star

Fortune Star Technical Co., Limited

TITLE: 2.54mm Female Header Dual row Horizontal SMT

| | | | | | | |
|--|----------|--------|------------|------------|--------------|---------------------|
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | DRAWN | Robert | DATE: | 2012-03-28 | DRAWING NO.: | FH254085HS1Y-2XX-01 |
| X.XX ±0.25 | CHECKED | Jhon | PROJECTION | | | |
| X.X ±0.35 | APPROVED | Jack | SIZE: | A4 | | |
| X. ±0.50 | | | SCALE: | 1:1 | SHEET: | 1/1 |
| | | | | | REV: | A |