RoHS compliant

SPECIFICTIONS

Contact:	brass
Contact plating:	see ordering information
Insulator:	black glass filled polyester UL94V-0
Current rating:	3.0Amps
Contact resistance:	20mΩ max.
Insulation resistance:	1000MΩ min. at 100V
Withstanding Voltage:	550V AC/minute
Operaing temperature:	-55°C to+105°C
Soldering temperature:	260°C, 10S
Critical Dimensions: ▼	

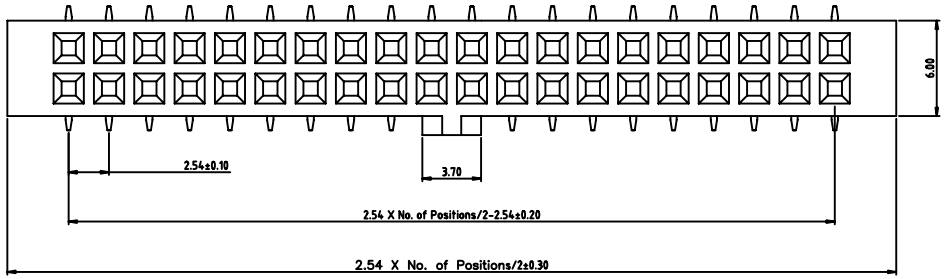

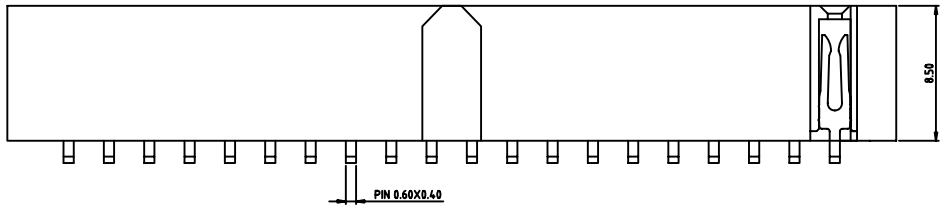



Recommended P.C.B Layout(±0.05)

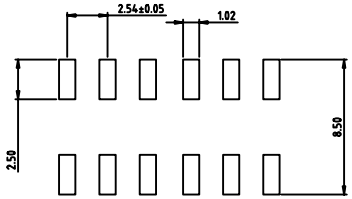

Ordering Information

FH254085VS1Y - 2XX X X X 01

- No. of pins: 2*3-2*40
- Plating Option: A = Gold Flash, B = 3U" Gold, C = 5U" Gold, E = 15U" Gold, T = Tin, Z = Special
- Insulator Material Option: A = PBT, B = PA6T, F = LCP, Z = Special
- Packing Option: A = Tray, B = Bag, C = Tube, Z = Special

Fortune Star Fortune Star Technical Co., Limited

TITLE: 2.54mm Female Header Dual row Vertical SMT

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE: 2012-03-28		DRAWING NO.: FH254085VS1Y-2XX-01	
X.XX ±0.25 X.X ±0.35 X. ±0.50	X.X° ±2° X.° ±3°	CHECKED	Jhon	PROJECTION			
		APPROVED	Jack	SIZE: A4	UNIT: MM	SCALE: 1:1	SHEET: 1/1 REV: A