


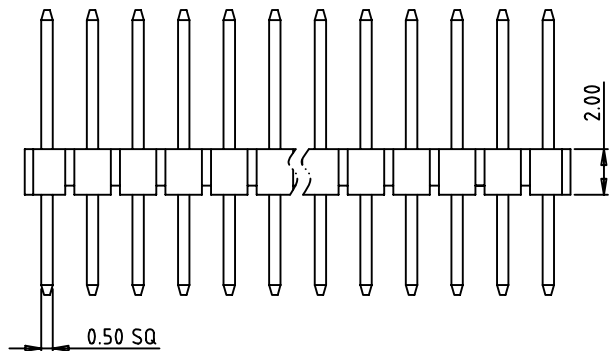


RoHS compliant

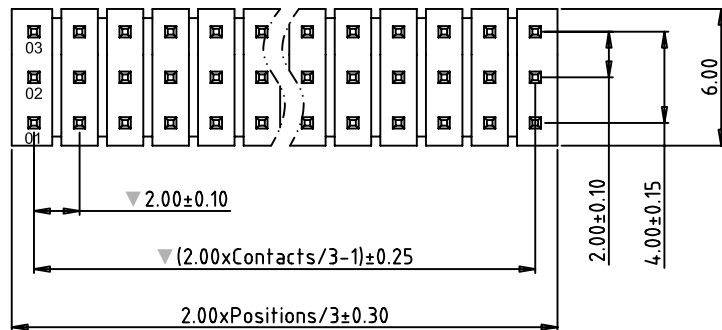

Recommended P.C.B Layout

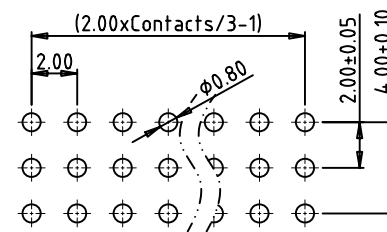

Recommended P.C.B Layout(±0.05)

Specification:

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: LCP+30%G.F

Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 450V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: -45°C to +105°C

Soldering temperature: +245°C, 5s.

Ordering Information

PH200020D1 - 3XX X X X 01 - XXXX - 0200 - XXXX

No. of pins
3*3-3*40

Plating Option
A = Gold Flash
B = 3U" Gold
C = 5U" Gold
E = 15U" Gold
T = Tin
Z = Special

Insulator Material
Option
A = PBT
B = PA6T
F = LCP
Z = Special

Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

No. of Insulator
01 = 1 Insulator
02 = 2 Insulators
03 = 3 Insulators

PA Length
0600 = 6.00mm
2500 = 25.0mm

PB Length
0900 = 9.00mm
1500 = 15.0mm

PC Length
0900 = 9.00mm
1500 = 15.0mm

Fortune Star

Fortune Star Technical Co., Limited

TITLE:		2.00mm Pin Header Triple row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	PH200020D1-3XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
					REV:	A	