






Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 450V AC/minute


Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: +245°C, 5s.

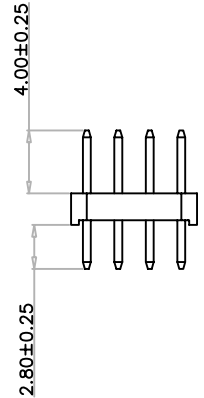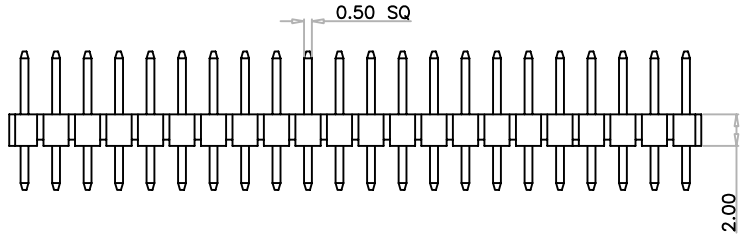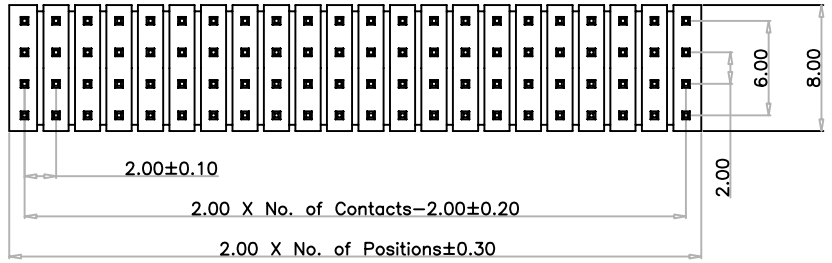

Recommended P.C.B Layout

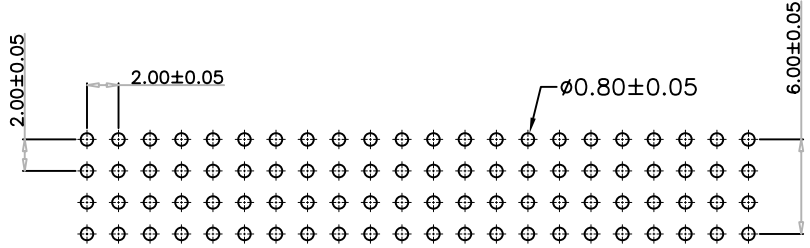

Ordering Information

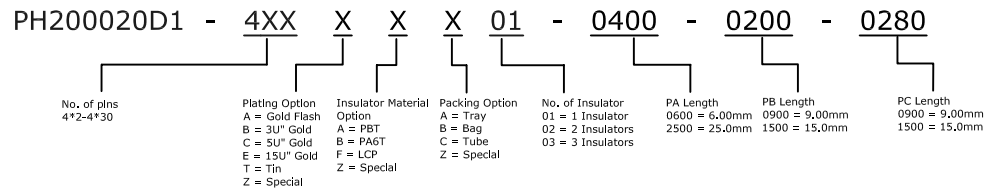

Fortune Star

Fortune Star Technical Co., Limited

TITLE: 2.00mm Pin Header Quad row Dip type									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	PH200020D1-4XX-01		
X.XX	±0.25	X.X°	±2°	CHECKED		Jhon	PROJECTION		
X.X	±0.35	X.°	±3°	APPROVED		Jack	SIZE:	UNIT:	SCALE:
X.	±0.50			A4	MM	1:1	SHEET:	1/1	REV: A