







Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50µ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 550V AC/minute


Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

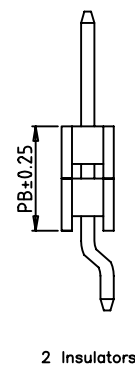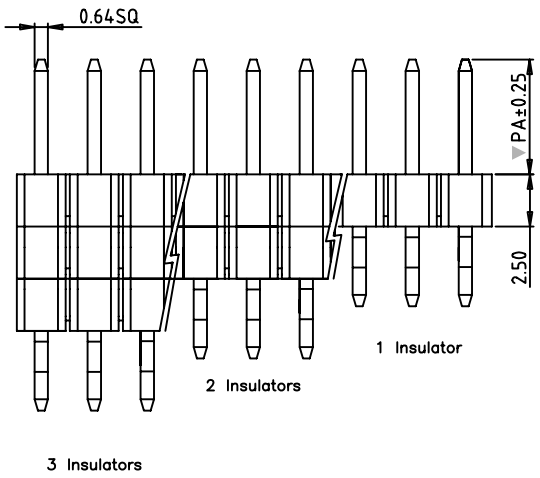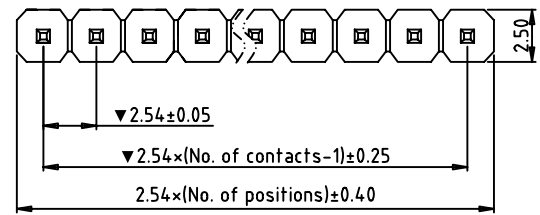

Recommended P.C.B
 Layout (±0.05)



Ordering Information

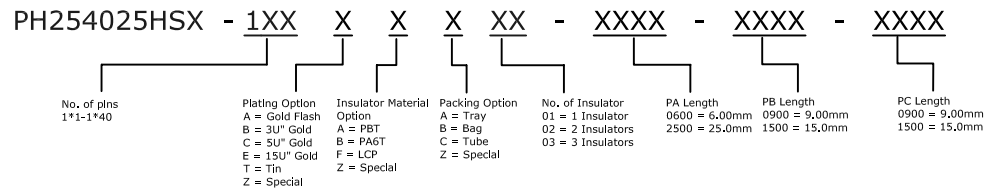

Fortune Star

 Fortune Star Technical Co., Limited

TITLE: 2.54mm Pin Header Single row Horizontal SMT									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	PH254025HSX-1XX-XX		
X.XX	±0.25	X.X°	±2°	CHECKED	Jhon	PROJECTION			
X.X	±0.35	X.°	±3°	APPROVED	Jack	SIZE:	A4	UNIT:	MM
X.	±0.50					SCALE:	1:1	SHEET:	1/1
						REV:	A		