






Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: +245°C, 5s.

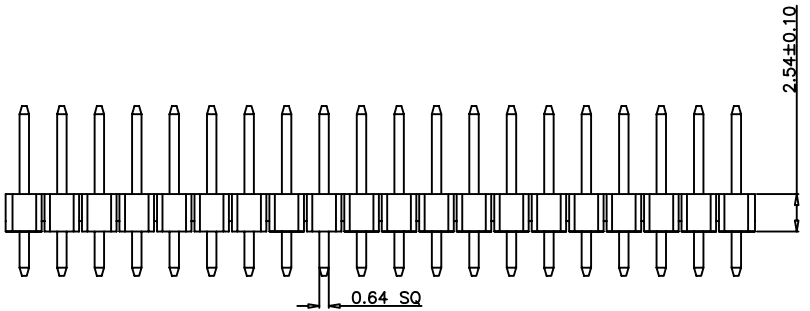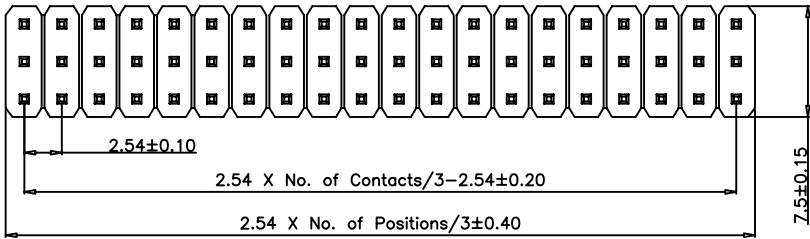

Recommended P.C.B
 Layout(±0.05)

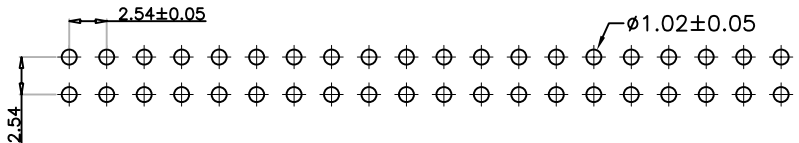

Ordering Information

PH254254D1 - 3XX X X X 01 - 0600 - 0254 - 0300

No. of pins 3*3-3*40
 Plating Option A = Gold Flash B = 3U" Gold C = 5U" Gold E = 15U" Gold T = Tin Z = Special
 Insulator Material Option A = PBT B = PA6T F = LCP Z = Special
 Packing Option A = Tray B = Bag C = Tube Z = Special
 No. of Insulator 01 = 1 Insulator 02 = 2 Insulators 03 = 3 Insulators
 PA Length 0600 = 6.00mm 2500 = 25.0mm
 PB Length 0900 = 9.00mm 1500 = 15.0mm
 PC Length 0900 = 9.00mm 1500 = 15.0mm

Fortune Star		Fortune Star Technical Co., Limited			
TITLE: 2.54mm Pin Header Triple row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:
X.XX ±0.25	CHECKED	Jhon	PROJECTION		PH254250DX-2XX-XX
X.X ±0.35	APPROVED	Jack	SIZE:	UNIT:	SCALE:
X. ±0.50			A4	MM	1:1
					SHEET: 1/1
					REV: A